



SCN125



FEATURES

- Stainless steel finishing
- Front access for easier maintenance.
- Built-in storage bin: allows most undercounter installations for easier fit-in solutions.
- Reduced dimensions
- Optimum ratio between ice production and bin capacity
- Low power and water consumption
- R290 refrigerant



**CONDENSING
SYSTEM**
air cooled

REFRIGERANT GAS
R290

**VOLTAGE
V/HZ/PH**
230\50\1

**Factory 12, Sandown Square
56 Smith Rd
Springvale Vic 3171**

Self Contained Ice Machine 133 kg

CERTIFICATIONS



OPERATING REQUIREMENTS


	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%



SCN125



Self Contained Ice Machine 133 kg

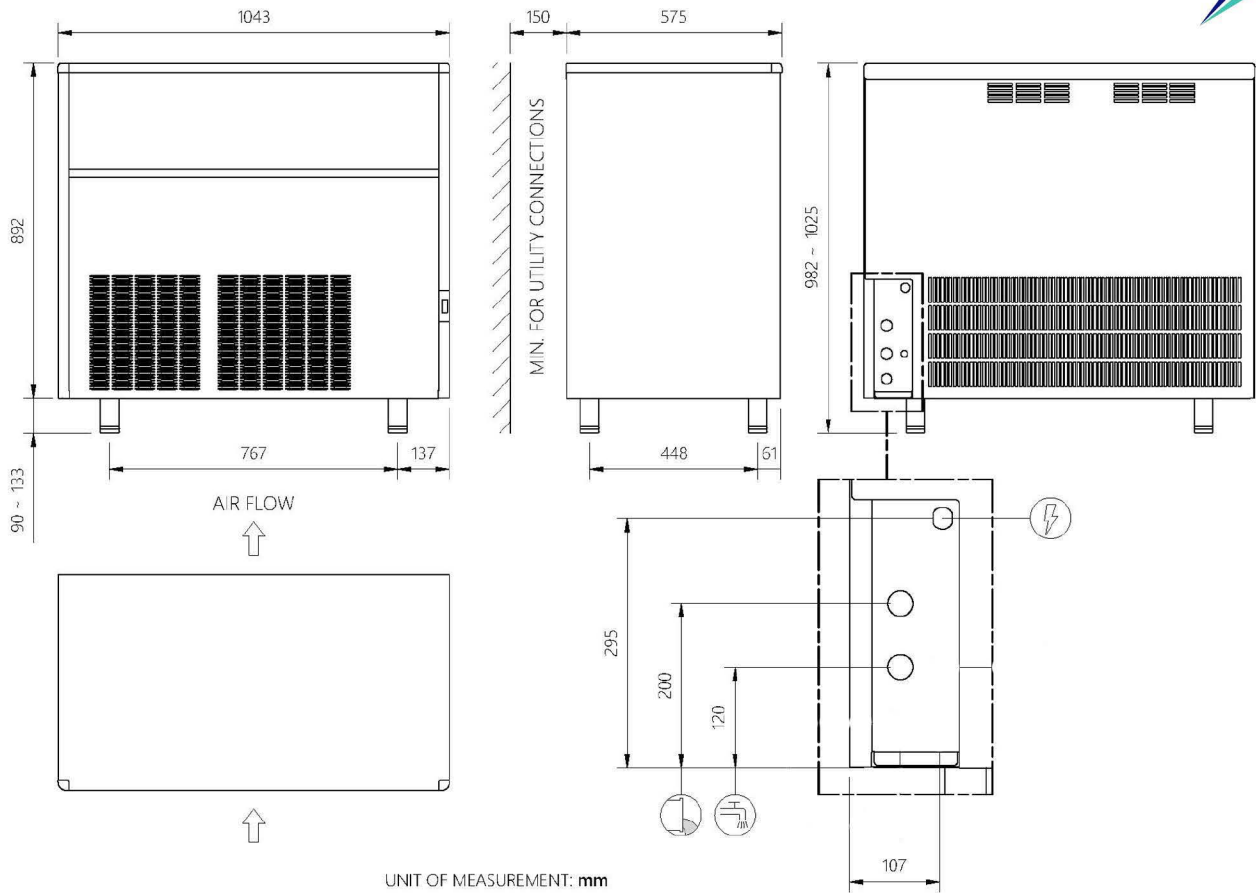

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			Size (W x D x H)									
1.042 x 575 x 893 mm			1100 x 640 x 1070 mm									
Net weight			Gross weight									
94 kg			102kg									
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A
			kg	kg	kg							
SCN125	230\50\1	A	134	133	104	50	3,1	23	21	1.235	3 x 1,0	10