




SCN45

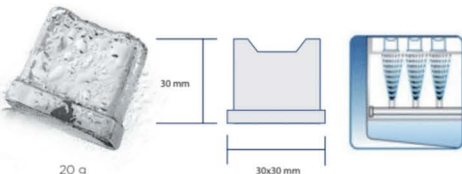

	FEATURES • Stainless steel finishing • Front access for easier maintenance. • Built-in storage bin: allows most undercounter installations for easier fit-in solutions. • Reduced dimensions • Optimum ratio between ice production and bin capacity • Low power and water consumption • R290 refrigerant 																	
	CONDENSING SYSTEM Air cooled		Factory 12, Sandown Square 56 Smith Rd Springvale Vic 3171															
	REFRIGERANT GAS R290																	
	VOLTAGE V/HZ/PH 230\50\1																	
CERTIFICATIONS 	OPERATING REQUIREMENTS <table><tr><td></td><td>Minimum</td><td>Maximum</td></tr><tr><td>Air temperature</td><td>10</td><td>43</td></tr><tr><td>Water temperature</td><td>5</td><td>38</td></tr><tr><td>Water pressure</td><td>1 bar (14 psi)</td><td>5 bar (70 psi)</td></tr><tr><td>Electrical voltage</td><td>-10%</td><td>+10%</td></tr></table>				Minimum	Maximum	Air temperature	10	43	Water temperature	5	38	Water pressure	1 bar (14 psi)	5 bar (70 psi)	Electrical voltage	-10%	+10%
	Minimum	Maximum																
Air temperature	10	43																
Water temperature	5	38																
Water pressure	1 bar (14 psi)	5 bar (70 psi)																
Electrical voltage	-10%	+10%																

Self Contained Ice Machine 47 kg



SCN45



Self Contained Ice Machine 47 kg



UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			485 x 575 x 816 mm			Size (W x D x H)			940 x 640 x 550 mm			
Net weight			48 kg			Gross weight			57kg			
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A
			kg	kg	kg							
SCN45	230\50\1	A	50	47	40	18	0,9	9	5	460	3 x 1,0	10