





DISP-125




	<p>FEATURES</p> <ul style="list-style-type: none"> • Compact ice or ice & water automatic dispenser, with appealing, contemporary "touch-screen" design. • Push Button activated. • Possible to set ice only or ice & water on site and desired ice dosage. • Fast & friendly cleaning mode for the end user. • Full frontal visibility of settings and errors for preventative service check. • Natural refrigerant R290 propane.
--	---

<p>DXN 187 Cubelet 1 g L 16 x P 15 x H 7-8 mm</p> 	<p>CONDENSING SYSTEM Air cooled</p>	
<p>REFRIGERANT GAS R290</p>		
<p>VOLTAGE V/HZ/PH 230\50\1</p>		

Self Contained Ice Machine 125 kg



DISP-125

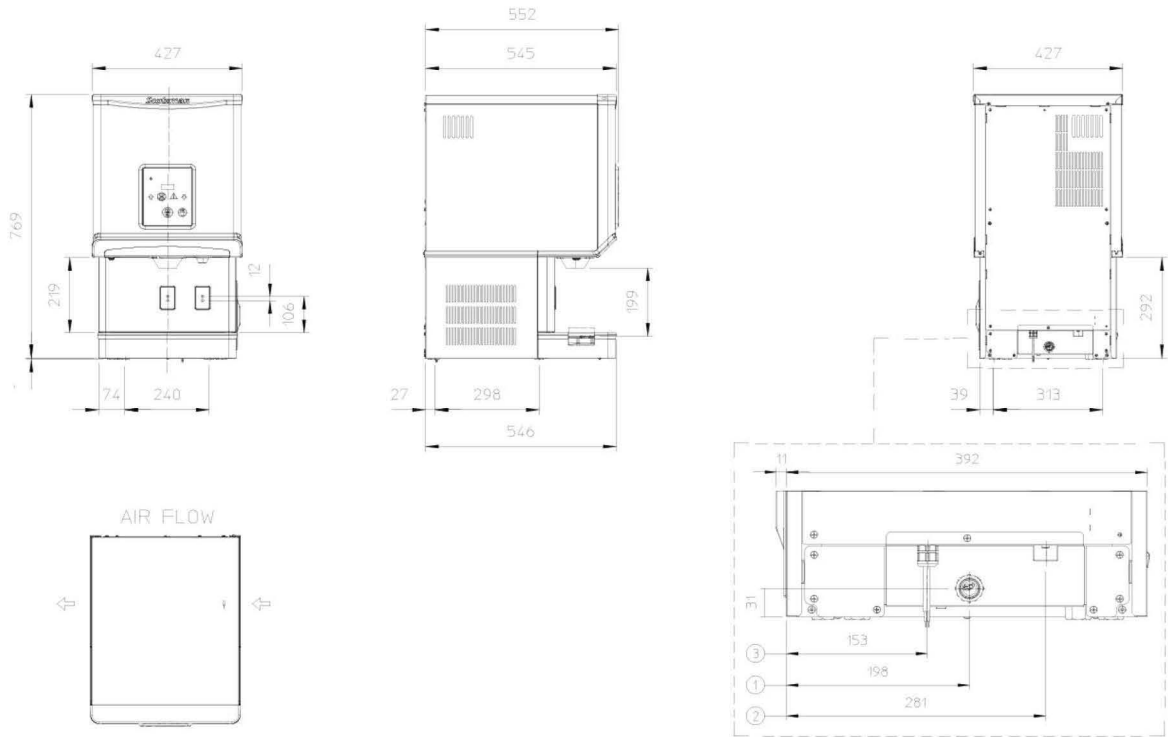

Self Contained Ice Machine 125 kg

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			790 x 610 x 490 mm									
Net weight			56kg									
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	W	kWh/24h	l/h	W	No. x Ømm2	A
DISP-125	230\50\1	A	kg	kg	kg	7	1,2 kw	12,6	4	530	3 x 0,0	10

CERTIFICATIONS		OPERATING REQUIREMENTS		
		Minimum	Maximum	
		Air temperature	10	38
		Water temperature	5	38
		Water pressure	1 bar (14 psi)	35 bar (70 psi)
		Electrical voltage	-10%	+10%