

ICE200

Production 200kgs

Modular Cube Ice Maker



Other models in this range: ICE150 - ICE220 - ICE300 - ICE500




Vertical Cube System



T304 Stainless Steel Panels



Proximity Condenser Air Filter



Auto-alert Indicator Lights



Double Stack
(Needs a stacking kit sold separately)

24 Hour Volume Production

Air Cooled		
70° F/21° C 50° F/10° C lb/kg	Air Water	AHRI 90° F/32° C 70° F/21° C lb/kg
452/200		322/146



Cube Ice



Dice Cube - 12g
(26.5 x 26.5 x 26 mm)

Modular Bin Options




Factory 12, Sandown Square
56 Smith Rd Springvale Vic 3171

(03) 9562 4400
www.frostline.com.au

Dimension

Air cooled unit

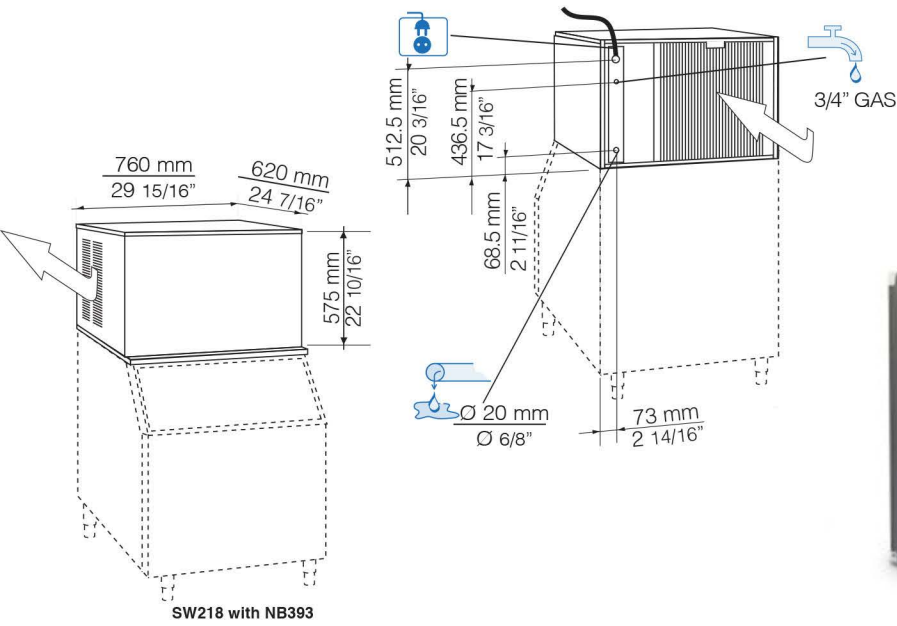

Specifications

ICE200		[Btu/h] [W]	[Ømm ²]	[V/Hz/Ph]	[W]	FUSE	[kwh/100lbs]	[L/100lbs]	[kg] [lbs] [kg] [lbs]
		8900 2600	3x1.5	230/50/1	1000	16 A	6.47	57.9	70 154 85 187

Performance Table

AS VERSIONS

°C / °F	50°		60°		70°		90°	
	10°	15°	15°	21°	21°	32°	32°	
10°	215	207	195	175	175	175	175	kg
50°	475	456	430	386	386	386	386	lbs
21°	200	195	186	165	165	165	165	kg
70°	452	440	410	364	364	364	364	lbs
32°	152	148	146	132	132	132	132	kg
90°	335	326	322	291	291	291	291	lbs
38°	132	128	125	118	118	118	118	kg
100	291	282	276	260	260	260	260	lbs

WS VERSIONS

°C / °F	50°		60°		70°		90°	
	10°	15°	15°	21°	21°	32°	32°	
10°	200	197	187	167	167	167	167	kg
50°	440	434	412	368	368	368	368	lbs
21°	197	192	182	163	163	163	163	kg
70°	434	423	401	360	360	360	360	lbs
32°	180	175	165	153	153	153	153	kg
90°	397	386	364	337	337	337	337	lbs
38°	170	165	159	146	146	146	146	kg
100	375	364	350	322	322	322	322	lbs

Operating Range

Minimum		Maximum
10°C (50°F)		40°C (103°F)
5°C (41°F)		35°C (95°F)
-10%		+10%
1 BAR 14 psi		5 BAR 70 psi

Specifications and design are subject to change without notice.