



SCN35



FEATURES

- Stainless steel finishing
- Front access for easier maintenance.
- Built-in storage bin: allows most undercounter installations for easier fit-in solutions.
- Reduced dimensions
- Optimum ratio between ice production and bin capacity
- Low power and water consumption
- R290 refrigerant



CONDENSING SYSTEM
air cooled

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
230\50\1

**Factory 12, Sandown Square
56 Smith Rd
Springvale Vic 3171**

CERTIFICATIONS




OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Self Contained Ice Machine 33 kg



SCN35

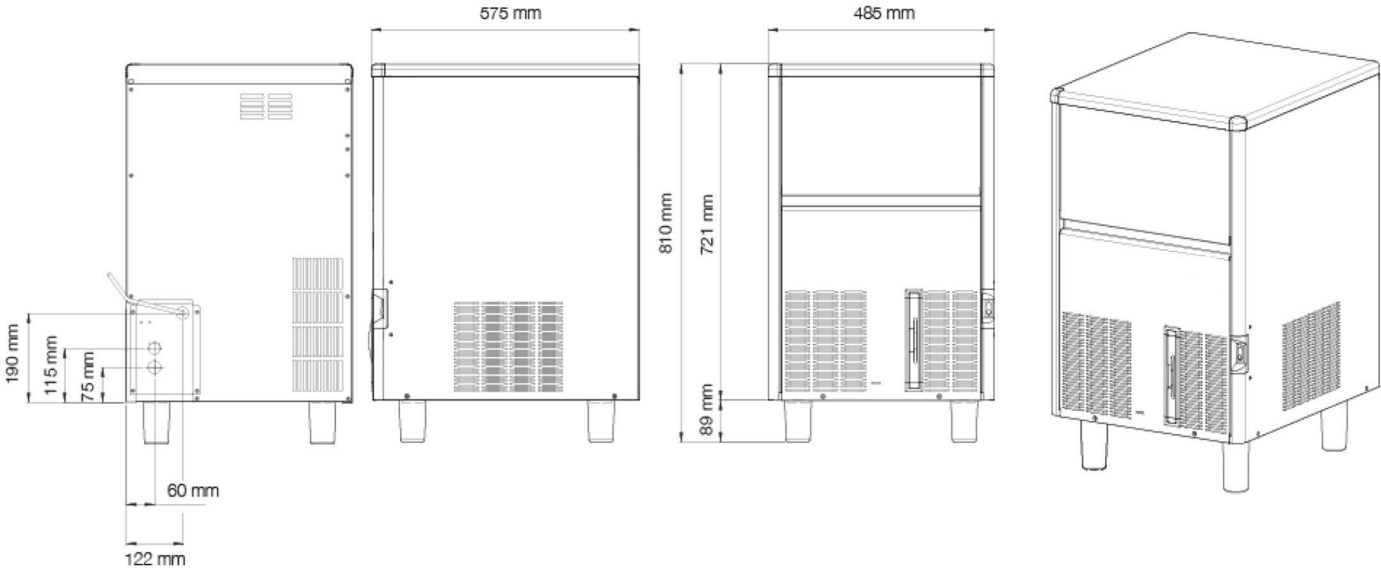

UNIT DATA			SHIPPING DATA						(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)	485 x 575 x 721 mm		Size (W x D x H)			550 x 640 x 830 mm						
Net weight	45 kg		Gross weight			46kg						
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/24h	l/h	W	No. x Ømm2	A
			kg	kg	kg							
SCN35	230\50\1	A	36	33	27	13	0,7	7	3	340	3 x 1,0	10